

Application and Design

VCD-42V is a low leakage damper with vertical blade orientation designed to meet the highest standards established for commercial control dampers. The VCD-42V is intended for application in medium to high pressure and velocity systems. This model is IECC (International Energy Conservation Code) compliant with a leakage rating of 3 cfm/ft² @ 1 in. wg (55 cmh/m² @ .25 kPa) or less.

Ratings


Pressure: 2.0 - 6.0 in. wg (.5 kPa - 1.5 kPa) pressure differential

Velocity: 3000 fpm to 6000 fpm (15.2 m/s - 30.5 m/s)


Leakage: 6 cfm/ft² @ 4 in. wg (110cmh/m² @ 1 kPa)
3 cfm/ft² @ 1 in. wg (55cmh/m² @ .25 kPa)

Temperature: 200°F (93°C)

Construction	Standard	Optional
Frame Material	Galvanized steel	-
Frame Material Thickness	16 ga. (1.5mm)	-
Frame Type	5 in. x 1 in. (127mm x 25mm) hat channel	Single flange, Reverse flange, Double flange
Blade Material	Extruded Aluminum	-
Blade Type	Airfoil	-
Linkage	Plated steel out of airstream, concealed in jamb	304SS
Axle Bearings	Synthetic with thrush washers	Bronze or 304SS with thrush washers
Axle Material	Plated steel	304SS
Blade Seals	TPE	Silicone
Jamb Seals	304SS	-
Paint Finishes	-	Baked Enamel, Epoxy, Hi Pro Polyester, Industrial Epoxy or Permatector™

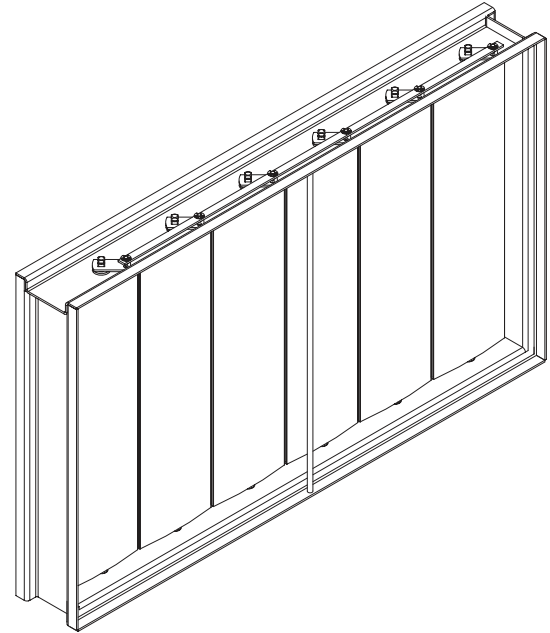

• W & H dimension furnished approximately ¼ in. (6mm) undersize.

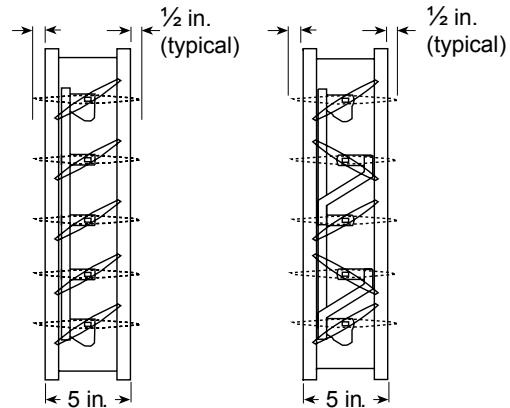

Parallel Blades

Opposed Blades

Size Limitations

W x H	Minimum Size	Maximum Size
		Single Section
Inches	6 x 6	74 x 60
mm	152 x 152	1880 x 1524

Features:

- Blade seals - pressure activated to produce tighter sealing
- Wider range of electric and pneumatic actuators available

Options:

- Open Close Indicator (OCI)
- Galvanized steel sleeves
- Retaining Angles

This pressure drop testing was conducted in accordance with AMCA Standard 500-D using the three configurations shown. All data has been corrected to represent standard air at a density of 0.075 lb/ft^3 (1.201 kg/m^3).

Actual pressure drop found in any HVAC system is a combination of many factors. This pressure drop information along with an analysis of other system influences should be used to estimate actual pressure losses for a damper installed in a given HVAC system.

AMCA Test Figures

Figure 5.3 Illustrates a fully ducted damper. This configuration has the lowest pressure drop of the three test configurations because entrance and exit losses are minimized by straight duct runs upstream and downstream of the damper.

Figure 5.2 Illustrates a ducted damper exhausting air into an open area. This configuration has a lower pressure drop than Figure 5.5 because entrance losses are minimized by a straight duct run upstream of the damper.

Figure 5.5 Illustrates a plenum mounted damper. This configuration has the highest pressure drop because of extremely high entrance and exit losses due to the sudden changes of area in the system.

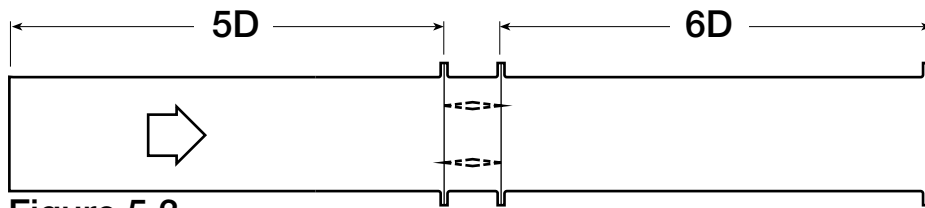


Figure 5.3

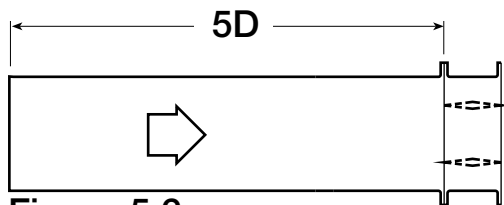


Figure 5.2

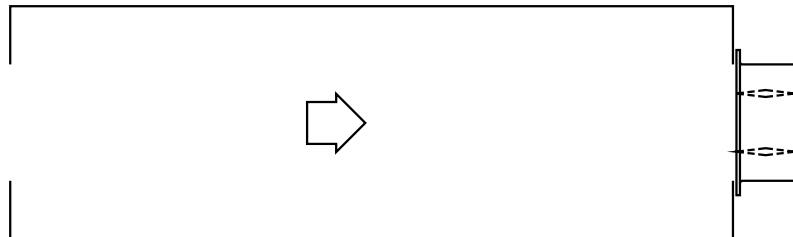


Figure 5.5

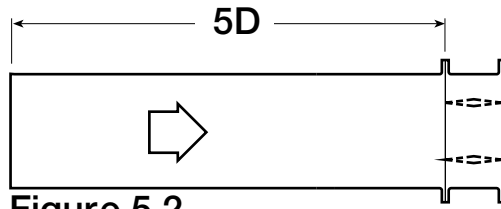


Figure 5.2

12 in. x12 in. (305mm x 305mm)		24x24 (610 mm x 610mm)		36x36 (914mm x 914mm)		12x48 (305mm x 1219mm)		48x12 (1219mm x 305mm)	
Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in wg)	Velocity (fpm)	Pressure Drop (in. wg)
500	.05	500	.01	500	.01	500	.03	500	.01
1000	.18	1000	.05	1000	.04	1000	.11	1000	.01
1500	.43	1500	.12	1500	.09	1500	.25	1500	.14
2000	.76	2000	.22	2000	.17	2000	.44	2000	.25
2500	1.19	2500	.34	2500	.26	2500	.69	2500	.39
3000	1.71	3000	.49	3000	.38	3000	1.00	3000	.57
3500	2.33	3500	.66	3500	.51	3500	1.36	3500	.77
4000	3.04	4000	.87	4000	.67	4000	1.78	4000	1.04

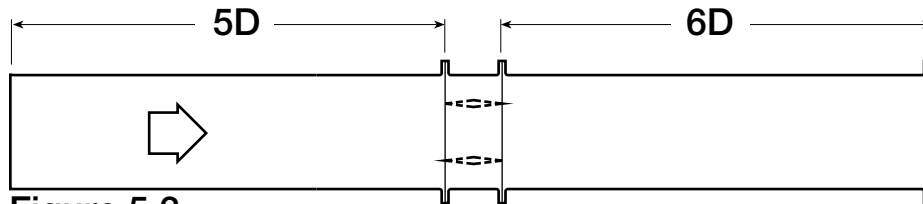


Figure 5.3

12 in. x12 in. (305mm x 305mm)		24x24 (610 mm x 610mm)		36x36 (914mm x 914mm)		12x48 (305mm x 1219mm)		48x12 (1219mm x 305mm)	
Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in wg)	Velocity (fpm)	Pressure Drop (in. wg)
500	.03	500	.01	500	.01	500	.02	500	.01
1000	.12	1000	.03	1000	.02	1000	.06	1000	.04
1500	.28	1500	.06	1500	.05	1500	.14	1500	.09
2000	.49	2000	.11	2000	.08	2000	.25	2000	.16
2500	.77	2500	.17	2500	.13	2500	.39	2500	.25
3000	1.11	3000	.24	3000	.19	3000	.57	3000	.36
3500	1.51	3500	.33	3500	.26	3500	.77	3500	.49
4000	1.98	4000	.43	4000	.34	4000	1.01	4000	.64


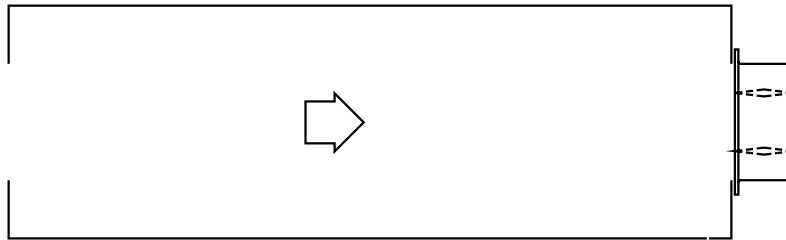




Figure 5.5

12 in. x12 in. (305mm x 305mm)		24x24 (610 mm x 610mm)		36x36 (914mm x 914mm)		12x48 (305mm x 1219mm)		48x12 (1219mm x 305mm)	
Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in wg)	Velocity (fpm)	Pressure Drop (in. wg)
500	.07	500	.04	500	.02	500	.05	500	.03
1000	.28	1000	.17	1000	.12	1000	.19	1000	.18
1500	.62	1500	.37	1500	.28	1500	.44	1500	.40
2000	1.11	2000	.66	2000	.50	2000	.78	2000	.72
2500	1.73	2500	1.04	2500	.78	2500	1.21	2500	1.12
3000	2.50	3000	1.50	3000	1.13	3000	1.75	3000	1.62
3500	3.41	3500	2.04	3500	1.53	3500	2.38	3500	2.21
4000	4.45	4000	2.66	4000	2.01	4000	3.11	4000	2.88

Leakage Data

Damper leakage (with blades fully closed) varies based on the type of low leakage seals applied. Model VCD-42V is available with silicone blade seals and stainless steel jamb seals. Leakage testing was conducted in accordance with AMCA Standard 500-D and is expressed as cfm/ft² of damper face area. All data has been corrected to represent standard air at a density of 0.075 lb/ft³ (1.201 kg/m³).

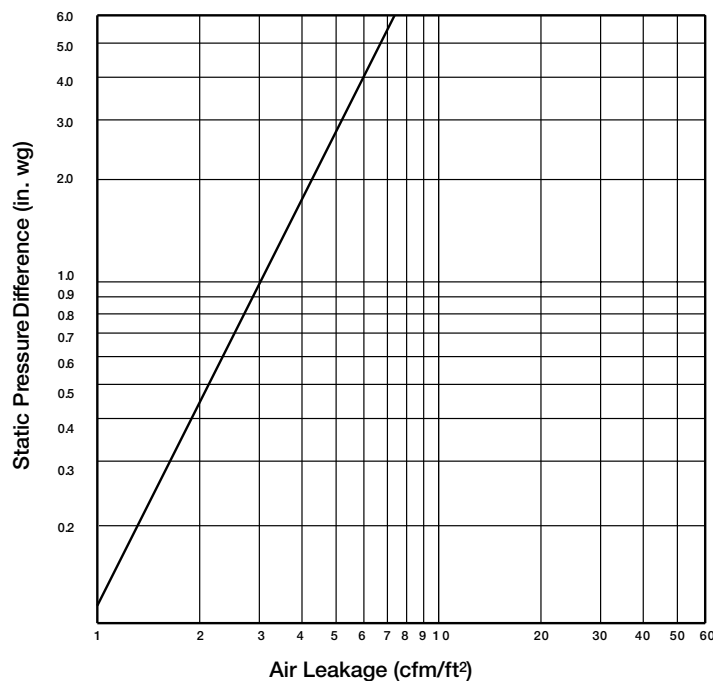

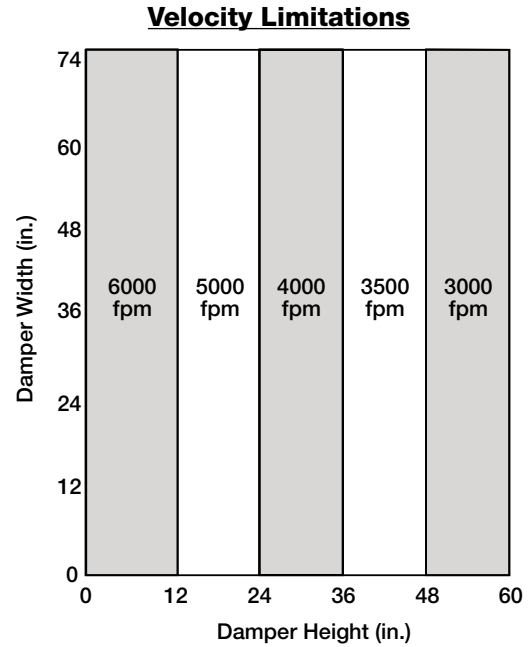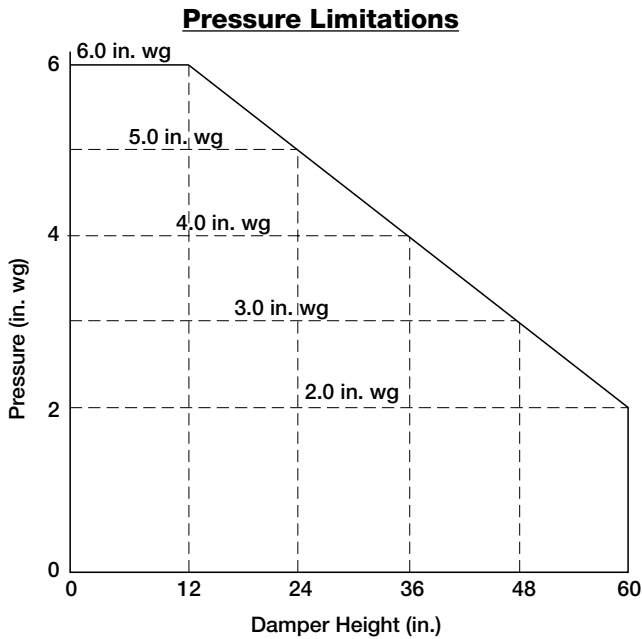

NOTE: VCD-42V will withstand higher pressures and velocities. Displayed ratings are conservative to prevent misapplication. Consult Greenheck if you have an application outside these limitations. Temperatures in excess of 180°F (82°C) require special consideration.

Specifications

Control dampers meeting the following specifications shall be furnished and installed where shown on plans and/or as described in schedules.

Dampers shall consist of: a 16 ga. (1.5mm) galvanized steel channel frame with 5 in. (127mm) depth; airfoil shaped, extruded aluminum blades (0.063 in. [1.6mm] thick) with metal blade to blade overlap (seal to seal only contact is not acceptable); blades shall be completely symmetrical relative to their axle point, presenting identical resistance to airflow in either direction or pressure on either side of the damper; 1/2 in. (6mm) dia. plated steel axles turning in synthetic (acetal) sleeve bearings; TPE blade seals; flexible stainless steel jamb seals; and external (out of the

airstream) blade-to-blade linkage.

Damper manufacturer's printed application and performance data including pressure, velocity, leakage, and temperature limitations shall be submitted for approval showing damper suitable for pressures to 6 in. wg (1.5 Pa), velocities to 6000 fpm (30.5 m/s) and temperatures to 250°F (121°C).

Damper leakage for approval showing standard air leakage less than 6 cfm/sq.ft. @ 4 in. wg (110cmh/m sq. @ 1 kPa). Testing and ratings developed in accordance with AMCA Standard 500-D.

Basis of design is Greenheck model VCD-42V.

